

1 **Evaluating Cloud-Optimized HDF5 for NASA's**
2 **ICESat-2 Mission**

3 **Luis A. Lopez¹, Andrew P. Barrett¹, Amy Steiker¹, Aleksandar Jelenak², Lisa**
4 **Kaser¹, Jeffrey E. Lee³**

5 ¹CIRES, National Snow and Ice Data Center, University of Colorado, Boulder., Boulder, CO, USA

6 ²The HDF Group, Champaign, IL, USA

7 ³NASA Goddard Space Flight Center, NASA / KBR, Greenbelt, MD, USA

Abstract

The Hierarchical Data Format (HDF) is a common archival format for n-dimensional scientific data; it has been utilized to store valuable information from astrophysics to earth sciences and everything in between. As flexible and powerful as HDF can be, it comes with big tradeoffs when it's accessed from remote storage systems, mainly because the file format and the client I/O libraries were designed for local and supercomputing workflows. As scientific data and workflows migrate to the cloud, efficient access to data stored in HDF format is a key factor that will accelerate or slow down "science in the cloud" across all disciplines. We present an implementation of recently available features in the HDF5 stack that results in performant access to HDF from remote cloud storage. This performance is on par with modern cloud-native formats like Zarr but with the advantage of not having to reformat data or generate metadata sidecar files (DMR++, Kerchunk). Our benchmarks also show potential cost-savings for data producers if their data are processed using cloud-optimized strategies.

1 Problem

Scientific data from NASA and other agencies are increasingly being distributed from the commercial cloud. Cloud storage enables large-scale workflows and should reduce local storage costs. It also allows the use of scalable on-demand cloud computing resources by individual scientists and the broader scientific community. However, the majority of this scientific data is stored in a format that was not designed for the cloud: The Hierarchical Data format or HDF.

The most recent version of the Hierarchical Data Format is HDF5, a common archival format for n-dimensional scientific data; it has been utilized to store valuable information from astrophysics to earth sciences and everything in between. As flexible and powerful as HDF5 can be, it comes with big trade-offs when it's accessed from remote storage systems.

HDF5 is a complex file format; we can think of it as a file system using a tree-like structure with multiple data types and native data structures. Because of this complexity, the most reliable way of accessing data stored in this format is using the HDF5 C API. Regardless of access pattern, nearly all tools ultimately rely on the HDF5-C library and this brings a couple issues that affect the efficiency of accessing this format over the network:

1.0.1 Metadata fragmentation

When working with large datasets, especially those that include numerous variables and nested groups, the storage of file-level metadata can become a challenge. By default, metadata associated with each dataset is stored in chunks of 4 kilobytes (KB). This chunking mechanism was originally intended to optimize storage efficiency and access speed on disks with hardware resources available more than 20 years ago. In datasets with many variables and/or complex hierarchical structures, these 4KB chunks can lead to significant fragmentation.

Fragmentation occurs when this metadata is spread out across multiple non-contiguous chunks within the file. This results in inefficiencies when accessing or modifying data because compatible libraries need to read from multiple, scattered locations in the file. Over time, as the dataset grows and evolves, this fragmentation can compound, leading to degraded performance and increased storage overhead. In particular, operations that involve reading or writing metadata, such as opening a file, checking attributes, or modifying variables, can become slower and more resource-intensive.

1.0.2 Global API Lock

Because of the historical complexity of operations with the HDF5 format (The HDF Group, n.d.), there has been a necessity to make the library thread-safe and similarly to what happens in the Python language, the simplest mechanism to implement this is to have a global API lock. This global lock is not as big of an issue when we read data from local disk but it becomes a major bottleneck when we read data over the network because each read is sequential and latency in the cloud is exponentially bigger than local access (MDN, 2024) (Scott, 2020).

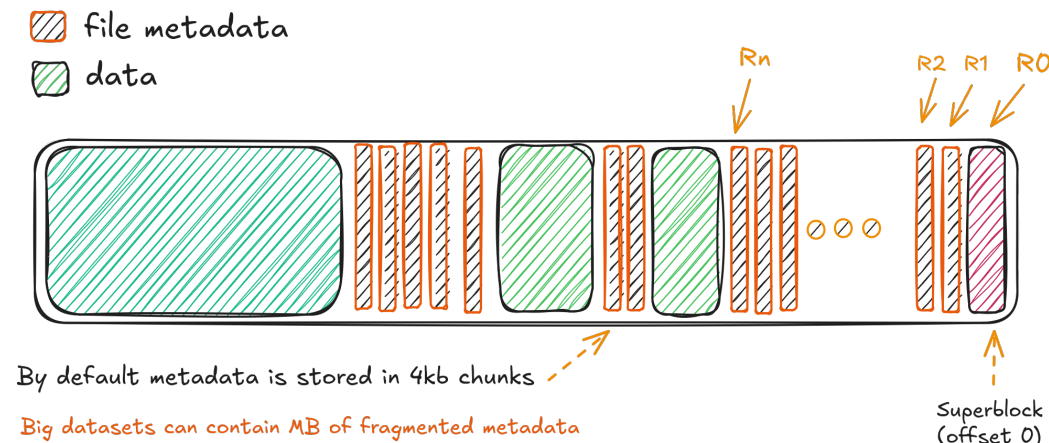


Figure 1: shows how reads (R_n) are done in order to access file metadata, In the first read, R_0 , the HDF5 library verifies the file signature from the superblock, subsequent reads, R_1, R_2, \dots, R_n , read file metadata, 4kb at the time.

1.0.3 Background and data selection

As a result of community feedback and “hack weeks” organized by NSIDC and UW eScience Institute in 2023 (ICESAT-2 HackWeek, 2023), NSIDC started the Cloud Optimized Format Investigation (COFI) project to improve access to HDF5 from the ICESat-2 mission, a spaceborne lidar that retrieves surface topography of the Earth’s ice sheets, land and oceans (Neumann et al., 2019). Because of its complexity, large size and importance for cryospheric studies we targeted the ATL03 data product. The most relevant variable in ATL03 are geolocated photon heights from the ICESat-2 ATLAS instrument. Each ATL03 file contains 1003 geophysical variables in 6 data groups. Although our research was focused on this dataset, most of our findings are applicable to any dataset stored in HDF5 and NetCDF4.

2 Methodology

We tested access times to original and different configurations of cloud-optimized HDF5 ATL03 files stored in AWS S3 buckets in region us-west-2, the region hosting NASA’s Earthdata Cloud archives. Files were accessed using Python tools commonly used by Earth scientists: h5py and Xarray (Hoyer & Hamman, 2017). h5py is a Python wrapper around the HDF5 C API. xarray¹ is a widely used Python package for working with n-dimensional data. We also tested access times using h5coro, a python package optimized for reading HDF5 files from S3 buckets and kerchunk, a

¹ h5py is a dependency of Xarray

85 tool that creates an efficient lookup table for file chunks to allow performant partial
86 reads of files.

87 The test files were originally cloud optimized by “repacking” them, using a relatively
88 new feature in the HDF5 C API called “paged aggregation”. Page aggregation does
89 2 things: first, it collects file-level metadata from datasets and stores it on dedicated
90 metadata blocks at the front of the file; second, it forces the library to write both
91 data and metadata using these fixed-size pages. Aggregation allows client libraries
92 to read file metadata with only a few requests using the page size as a fixed request
93 size, overriding the 1 request per chunk behavior.

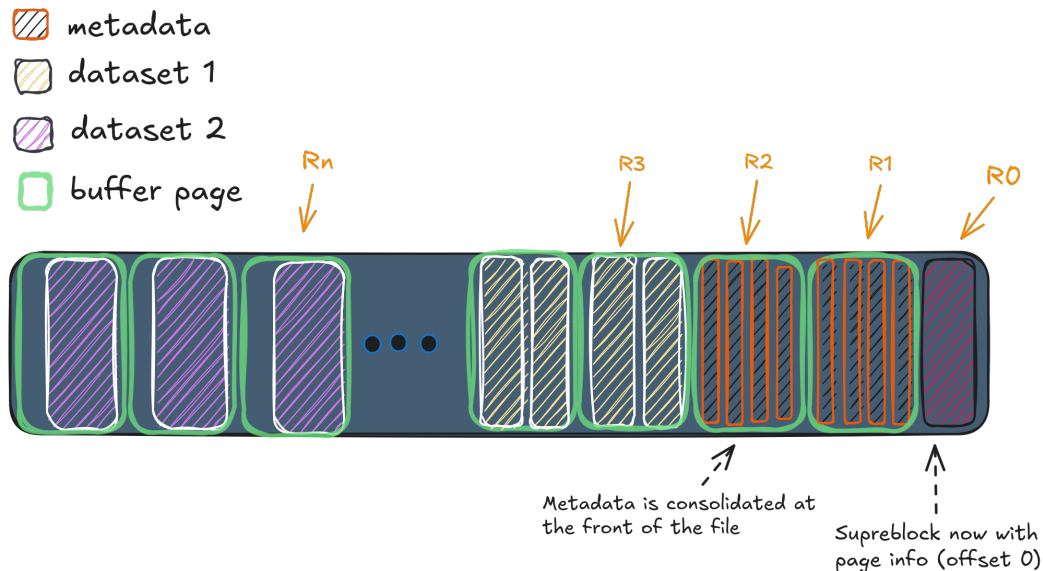


Figure 2: shows how file-level metadata and data gets internally packed once we use paged aggregation on a file.

94 As we can see in Figure 2, when we cloud optimize a file using paged-aggregation
95 there are some considerations and behavior that we had to take into account. The
96 first thing to observe is that page aggregation will –as we mentioned– consolidate
97 the file-level metadata at the front of the file and will add information in the so-
98 called superblock² The next thing to notice is that page size us uses across the
99 board for metadata and data as of October 2024 and version 1.14 of the HDF5
100 library, page size cannot dynamically adjust to the total metadata size.

101 This one page size for all approach simplifies how the HDF5 API reads the file (if
102 configured) but it also brings unused page space and chunk over-reads. In the case
103 of the ICESat-2 dataset (ATL03) the data itself has been partitioned and each gran-
104 ule represents a segment in the satellite orbit and within the file the most relevant
105 dataset is chunked using 10,000 items per chunk, with data being float-32 and using
106 a fast compression value, the resulting chunk size is on average under 40KB, which
107 is really small for an HTTP request, especially when we have to read them sequen-
108 tially. Because of these considerations, we opted for testing different page sizes, and

²The HDF5 superblock is a crucial component of the HDF5 file format, acting as the starting point for accessing all data within the file. It stores important metadata such as the version of the file format, pointers to the root group, and addresses for locating different file components

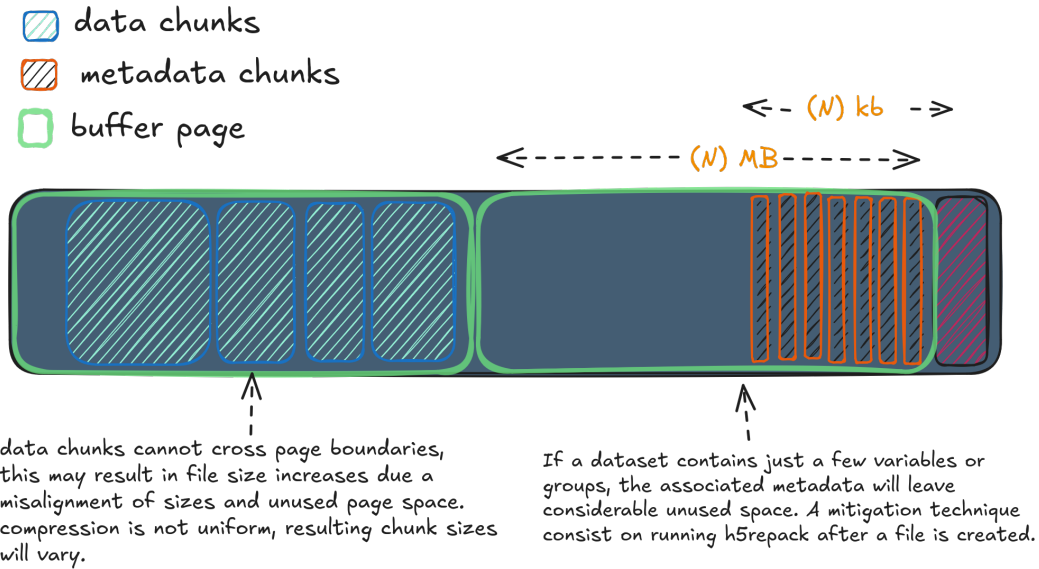


Figure 3: shows how file-level metadata and data packing inside aggregated pages leave unused space that can potentially increase the file size in a considerable way.

109 increase chunk size. The following table describes the different configurations used in
 110 our tests.

prefix	description	% file size increase	~km per chunk	page shape size	avg_chunk_size
original	original file from ATL03 v6 (1gb and 7gb)	0	1.5km	(10000,)N/A	35kb
original-kerchunk	kerchunk sidecar of the original file	N/A	1.5km	(10000,)N/A	35kb
page-only-4mb	paged-aggregated file with 4mb per page	~1%	1.5km	(10000,)4MB	35kb
page-only-8mb	paged-aggregated file with 4mb per pag8	~1%	1.5km	(10000,)8MB	35kb
rechunked-4mb	page-aggregated and bigger chunk sizes	~1%	10km	(100000,)4MB	400kb
rechunked-8mb	page-aggregated and bigger chunk sizes	~1%	10km	(100000,)8MB	400kb
rechunked-8mb-kerchunk	kerchunk sidecar of the last paged-aggregated file	N/A	10km	(100000,)8MB	400kb

111 This table represents the different configurations we used for our tests in 2 file sizes.
 112 It's worth noticing that we encountered a few outlier cases where compression and
 113 chunk sizes led page aggregation to an increase in file size of approximately 10%
 114 which was above the desired value for NSIDC (5% max) We tested these files using
 115 the most common libraries to handle HDF5 and 2 different I/O drivers that support
 116 remote access to AWS S3, fsspec and the native S3. The results of our testing is
 117 explained in the next section and the code to reproduce the results is in the attached
 118 notebooks.

3 Results

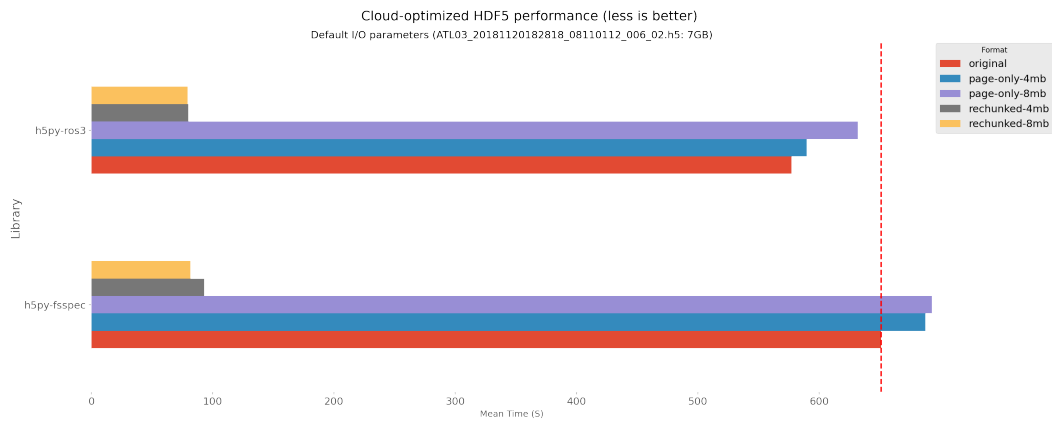


Figure 4: shows that using paged aggregation alone is not a complete solution. This behavior is caused by over-reads of data now distributed in pages and the internals of HDF5 not knowing how to optimize the requests. This means that if we cloud optimize alone and use the same code, in some cases we'll make access to these files even slower. A very important thing to notice here is that rechunking the file, in this case using 10X bigger chunks results in a predictable 10X improvement in access times without any cloud optimization involved. Having less chunks generates less metadata and bigger requests, in general it is recommended that chunk sizes should range between 1MB and 10MB [Add citation, S3 and HDF5] and if we have enough memory and bandwidth even bigger (Pangeo recommends up to 100MB chunks) [Add citation].

4 Recommendations

We have split our recommendations for the ATL03 product into 3 main categories, creating the files, accessing the files, and future tool development.

4.1 Recommended cloud optimizations

Based on our testing we recommend the following cloud optimizations for creating HDF5 files for the ATL03 product: Create HDF5 files using paged aggregation by setting HDF5 library parameters:

1. File page strategy: `H5F_FSPACE_STRATEGY_PAGE`
2. File page size: 8000000 If repacking an existing file, `h5repack` contains the code to alter these variables inside the file

```
h5repack -S PAGE -G 8000000 input.h5 output.h5
```

3. Avoid using unlimited dimensions when creating variables because the HDF5 API cannot support it inside buffered pages and representation of these variables is not supported by Kerchunk.

4.1.1 Reasoning

Based on the variable size of ATL03 it becomes really difficult to allocate a fixed metadata page, big files contain north of 30MB of metadata, but the median sized file is below 8MB. If we had adopted user block we would have caused an increase in the file size and storage cost of approximate 30% (reference to our tests). Another consequence of using a dedicated fixed page for file-level metadata is that metadata overflow will generate the same impact in access times, the library will fetch the metadata in one go but the rest will be using the predefined block size of 4kb.

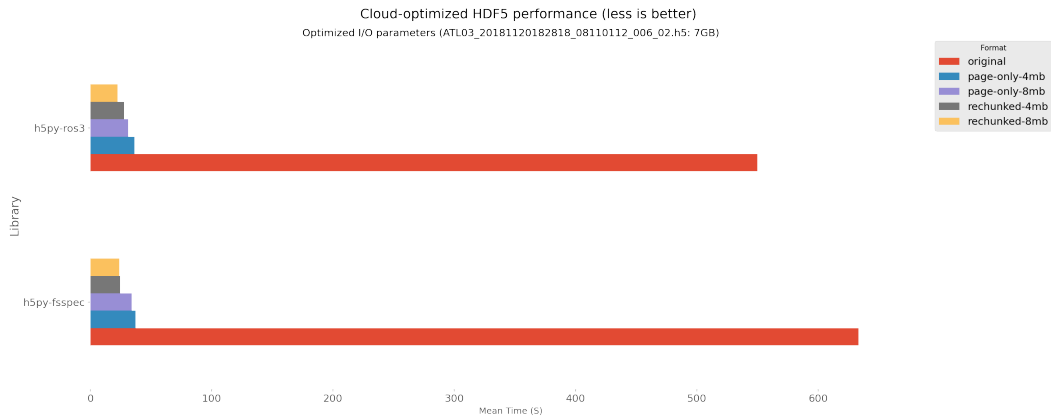


Figure 5: shows that performance once the I/O configuration is aligned with the chunking in the file, access times perform on par with cloud optimized access patterns like Kerchunk/Zarr. These numbers are from in-region execution. Out of region is considerably slower for the non cloud optimized case.

141 Paged aggregation is thus the simplest way of cloud optimizing an HDF5 file as the
 142 metadata will keep filling dedicated pages until all the file-level metadata is stored
 143 at the front of the file. Chunk sizes cannot be larger than the page size and when
 144 chunk sizes are smaller we need to take into account how these chunks will fit on a
 145 page, in an ideal scenario all the space will be filled but that is not the case and we
 146 will end up with unused space See 2.

147 4.2 Recommended access patterns

148 In progress

149 4.3 Recommended tooling development

150 In progress

151 4.4 Mission implementation

152 ATL03 is a complex science data product containing both segmented (20 meters
 153 along-track) and large, variable-rate photon datasets. ATL03 is created using
 154 pipeline-style processing where the science data and NetCDF-style metadata are
 155 written by independent software packages. The following steps were employed to
 156 create cloud-optimized Release 007 ATL03 products, while minimizing increases in
 157 file size:

- 158 1. Set the “file space strategy” to `H5F_FSPACE_STRATEGY_PAGE` and
 159 enabled “free space tracking” within the HDF5 file creation property list.
- 160 2. Set the “file space page size” to 8MiB.
- 161 3. Changed all “COMPACT” dataset storage types to “CONTIGUOUS”.
- 162 4. Increased the “chunk size” of the photon-rate datasets (from 10,000 to 100,000
 163 elements), while making sure no “chunk sizes” exceeded the 8MiB “file space
 164 page size”.
- 165 5. Introduced a new production step that executes the “h5repack” utility (with
 166 no options) to create a “defragmented” final product.

167 5 Discussion

- 168 1. Chunking shapes and sizes
- 169 2. Paged aggregation vs User block
- 170 3. Side effects on different access patterns, e.g. Kerchunk

171 **6 References**

- 172 Hoyer, S., & Hamman, J. (2017). Xarray: N-D labeled arrays and datasets in
173 python. *J. Open Res. Softw.*, 5(1), 10.
- 174 ICESAT-2 HackWeek, H. C. (2023). h5cloud: Tools for cloud-based analysis of
175 HDF5 data (Version v1.0.0). Retrieved from <https://github.com/ICESAT-2HackWeek/h5cloud>
176
- 177 MDN, M. (2024, May). Understanding latency. Retrieved from [https://developer](https://developer.mozilla.org/en-US/docs/Web/Performance/Understanding_latency)
178 [.mozilla.org/en-US/docs/Web/Performance/Understanding_latency](https://developer.mozilla.org/en-US/docs/Web/Performance/Understanding_latency)
- 179 Neumann, T. A., Martino, A. J., Markus, T., Bae, S., Bock, M. R., Brenner, A. C.,
180 et al. (2019). The ice, cloud, and land elevation satellite – 2 mission: A global
181 geolocated photon product derived from the advanced topographic laser altimeter
182 system. *Remote Sensing of Environment*, 233, 111325. [https://doi.org/https://](https://doi.org/https://doi.org/10.1016/j.rse.2019.111325)
183 doi.org/10.1016/j.rse.2019.111325
- 184 Scott, C. (2020). Numbers every programmer should know. Retrieved from [https://](https://colin-scott.github.io/personal_website/research/interactive_latency.html)
185 [colin-scott.github.io/personal_website/research/interactive_latency](https://colin-scott.github.io/personal_website/research/interactive_latency.html)
186 [.html](https://colin-scott.github.io/personal_website/research/interactive_latency.html)
- 187 The HDF Group. (n.d.). Hierarchical Data Format, version 5. Retrieved from
188 <https://github.com/HDFGroup/hdf5>